



ANLY CONTROLLER

APR-4S 3-PHASE SEQUENCE PROTECTION RELAY




CHARACTERISTIC :

- 3-phase voltage and fault detector
- Can detect abnormal condition to prevent damages to the equipments
- Out-of-phase detection while the motor operating
- Install on DIN rail or fix with screw are available and no socket require


SPECIFICATION :

Operating voltage	AC(V) : 208~380, 380~480
Allowable operating voltage range	+20%, -20%
Rated frequency	50 / 60 Hz
Contact rating	250VAC 5A resistive load
Reset time	MAX 3sec
Power consumption	Approx. 2VA(AC 220V 60Hz)
Life	Mechanical: 5,000,000 times Electrical: 100,000 times
Ambient temperature	-10 ~ +50°C
Ambient humidity	MAX 85%RH
Weight	Approx. 106g

CONNECTION :

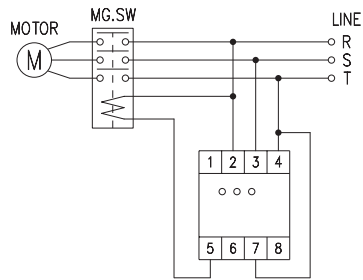


TIMING CHART :

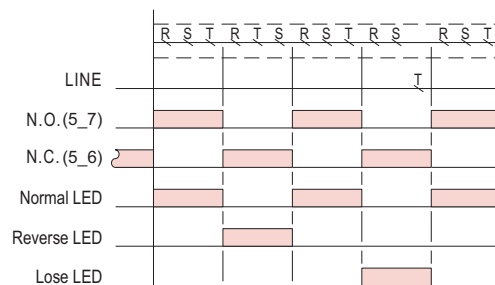

DIMENSIONS : (mm)

N type(Surface Mounting):

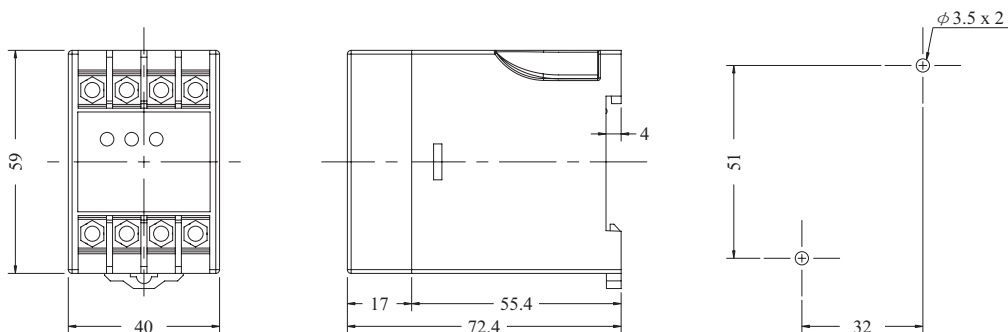

ONLY ELECTRONICS CO., LTD.

<http://www.ONLY.com.tw>

TAIWAN MAIN OFFICE : ONLY ELECTRONICS CO., LTD.

No. 19, Lane 202, Fushou St., Shinjuang City, Taipei, Taiwan 242
TEL: +886-2-2996-3202 FAX: +886-2-2996-2017

MALAYSIA BRANCH : JUSTY ELECTRONICS (M) SDN, BHD.

No.1, Jalan 6/89B, Kawasan Perindustrian Trisegi, Batu 3 1/2 Off Jalan Sungei Besi, 57100 Kuala Lumpur, Malaysia
TEL: +60-3-7983-5758 FAX: +60-3-7981-5052

HONG KONG BRANCH : ONLY ELECTRONICS (HK) LTD.

Flat K, 13/F, Edward Mansion, 141 Prince Edward Road W., Kowloon, Hong Kong
TEL: +852-2397-2505 FAX: +852-2397-6080

SHANGHAI BRANCH : ONLY TECHNOLOGY (WUXI) CO., LTD.

Room 13G, No.831, Xinzha Rd., Jingan District, Shanghai, China 200041
TEL: +86-21-6218-3300 FAX: +86-21-6217-5911

NO.APR4S-J-A